



OCXO SERIES 4000

FEATURES

Excellent frequency stability
Mechanical / Electrical frequency adjustment available

APPLICATIONS

- SATCOM
- BASE STATIONS
- TEST INSTRUMENTS

■ ELECTRICAL PERFORMANCE

PARAMETER	OCXO SERIES 4000	
	AT CUT CRYSTAL	SC CUT CRYSTAL
Supply voltage, nom.	15V, 12V, 5V $\pm 5\%$ Standard	
Power dissipation steady state	2.5 Watt Max.	
Heat up power	5 Watt Max	
Heat up time.	7 min Max	
Frequency range	1 To 160 MHz Standard	
Frequency Adjustment:		
Electrical (0 to 5V)	± 10 PPM Min	± 0.7 PPM Min
Electrical (0 to 10V)	± 15 PPM Min	± 1 PPM Min
Mechanical	± 1.5 PPM Min	± 0.6 PPM Min
Freq. stability vs. temperature		
LX: 0°C to 60°C	± 0.05 PPM	± 0.002 PPM
FZ: -30°C to 70°C	± 0.1 PPM	± 0.005 PPM
D3: -40°C to 85°	± 0.15 PPM	± 0.01 PPM
	(Standard, contact factory for different temp ranges and stabilities)	
Freq. stability vs. supply changes	± 0.005 PPM Max for $\pm 5\%$ Change	± 0.002 PPM Max for $\pm 5\%$ Change
Freq. stability vs. load changes	± 0.005 PPM Max for $\pm 5\%$ Change	± 0.001 PPM Max for $\pm 5\%$ Change
Long term stability (Aging)	± 1.5 PPM Max for 10 Years ± 0.3 PPM Max for 1 Years ± 0.002 PPM/Day Max.	± 0.6 PPM Max for 10 Years ± 0.05 PPM Max for 1 Years ± 0.0005 PPM/Day Max.
Output	HCMOS/TTL/Sine 0 to +13dBm	
Harmonics, Sub Harmonics	-30dBc(Sine Output)	
Spurious	-75dBc(Sine Output)	
Duty cycle	40/60% to 60/40%(HCMOS)	
Rise / fall time	10nS Max. (HCMOS, 10%~90%Vout, 90%~10%Vout)	
Short term Stability	1 E-10 /Sec	5 E-11 /Sec
Phase Noise (Sine Output 10MHZ)	Offset Phase Noise	Offset Phase Noise
	10Hz -95 dBc/Hz	10Hz -115 dBc/Hz
	100Hz -125 dBc/Hz	100Hz -135 dBc/Hz
	1000Hz -135 dBc/Hz	1000Hz -145 dBc/Hz
	10000Hz -150 dBc/Hz	10000Hz -150 dBc/Hz

中國 ● 香港 ● 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China


Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk

■ HOW TO ORDER (PART NUMBER)


Prefix	Output Type	Cut Type	Series	Revision	Temperature Range	Stability	Frequency
OX	1:TTL 2:HCMOS 3:ACMOS 4:LVCMOS 5:100K ECL 6:SINE 7:10K ECL 8:PECL 9:CUSTOM	0:AT (No Vcontrol) 1: SC (No Vcontrol) 2: AT (Mechanical Adj) 3: SC (Mechanical Adj) 4: AT (Elect Vcontrol) 5: SC (Elect Vcontrol) 6: AT (Mech & Elect.) 7: SC (Mech & Elect.)	4X:4000 40: Height= 17/25.4mm 41: Height= 27/50.8mm 42: Height= 47/101.6mm 44~49: Odd Height	A	First letter Lowest Temperature, Second letter Highest Temperature: From A=-55°C to Z=+70°C, Then: 1=+75°C, 2=+80°C, 3=+85°C... in 5°C steps Example: LZ: +0°C to +70°C LX: +0°C to +60°C FZ: -30°C to +70°C D3: -40°C to +85°C	Value x 10E-2 in PPM Example 28= 0.28PPM M 10= 0.1PPM	In MHZ

Example:

OX6740A-LZ-0.5-10.000

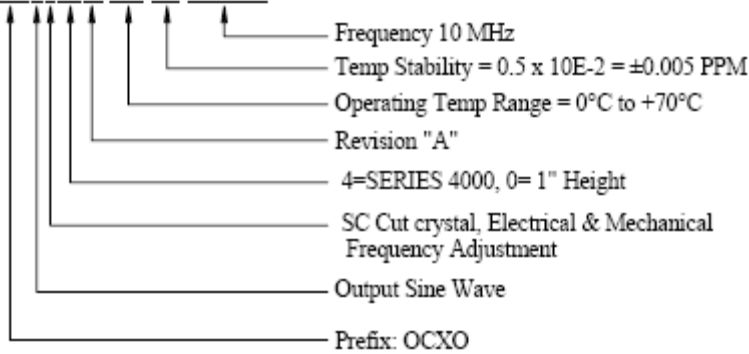

■ MECHANICAL SPECIFICATION

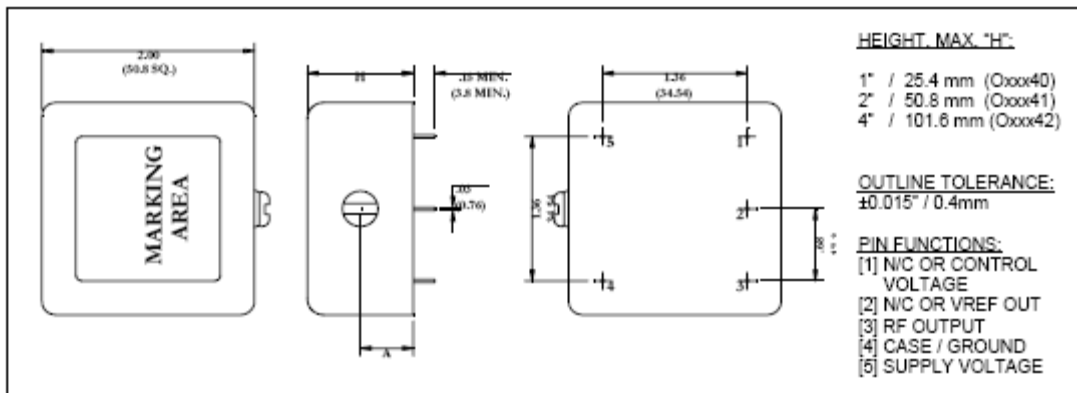

中國 ● 香港 ● 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk