




中川電子有限公司
Nakagawa Electronics Limited

- FEATURES
 - Ultra Miniature Package
 - Excellent frequency stability over temperature
 - Low Voltage
- APPLICATIONS
 - Mobile Phones
 - PDA
 - Other Mobile Communications

RTVS-104 Series




● SPECIFICATIONS*


FREQUENCY	13.000 MHz	19.200 MHz	19.680 MHz	26.000 MHz
SUPPLY VOLTAGE	3.0 ± 1% VDC	2.8 ± 5% VDC	2.8 ± 5% VDC	2.4 ± 5% VDC
OUTPUT LEVEL (Clipped Sine Wave) (10 kohm//10pF±10%)	1.0 Vp-p Min	0.8 Vp-p Min	0.8 Vp-p Min	0.6 Vp-p Min
CURRENT (10 kohm//10pF±10%)	1.5 mA Max	1.5 mA Max	1.5 mA Max	1.5 mA Max
OPERATING TEMPERATURE RANGE	-30°C to +80°C	-30°C to +80°C	-30°C to +80°C	-30°C to +75°C
STORAGE TEMPERATURE RANGE	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
FREQUENCY STABILITY VS TEMPERATURE RANGE	±2.5 ppm Max	±2.0 ppm Max	±2.0 ppm Max	±3.0 ppm Max
FREQUENCY STABILITY VS SUPPLY VOLTAGE (DC 2.8V±5%)	±0.3 ppm Max	±0.2 ppm Max	±0.2 ppm Max	±0.3 ppm Max
FREQUENCY STABILITY VS LOAD (10 kohm//10pF±10%)	±0.3 ppm Max	±0.2 ppm Max	±0.2 ppm Max	±0.2 ppm Max
FREQUENCY STABILITY VS AGING	±1.0 ppm Max/1 year	±1.0 ppm Max/1 year	±1.0 ppm Max/1 year	±1.0 ppm Max/1 year
FREQUENCY TOLERANCE AT 25°C	±1.0 ppm Max	±1.0 ppm Max	±1.0 ppm Max	±1.5 ppm Max
FREQUENCY STABILITY AFTER REFLOW	±1.0 ppm Max	±1.0 ppm Max	±1.0 ppm Max	±1.0 ppm Max
VOLTAGE CONTROL	±5.0 ppm to ±12.0 ppm (1.5VDC ± 1VDC)	±4.5 to ±8.5 ppm (2.4VDC ± 1VDC)	±3.5 to ±7.5 PPM (1.4VDC ± 1VDC)	±10 to ±20 ppm (1.2VDC ± 1VDC)
PHASE NOISE	-135 dBc/Hz Typ.(.1kHz offset)	-110 dBc/Hz Typ.(.1kHz offset)	-110 dBc/Hz Typ.(.1kHz offset)	-125 dBc/Hz Typ.(1kHz offset)
HARMONICS	-5 dBc Max	-7 dBc Max	-7 dBc Max	-7 dBc Max
PART NUMBER	RTVS-104EF230-S-13.000	RTVS-104DF228Q-S-19.200	RTVS-104DF228I-S-19.680	RTVS-104FF124C-S-26.000

* OTHER SPECIFICATIONS AVAILABLE, CONTACT SALES FOR DETAILS

● OUTLINE DRAWING

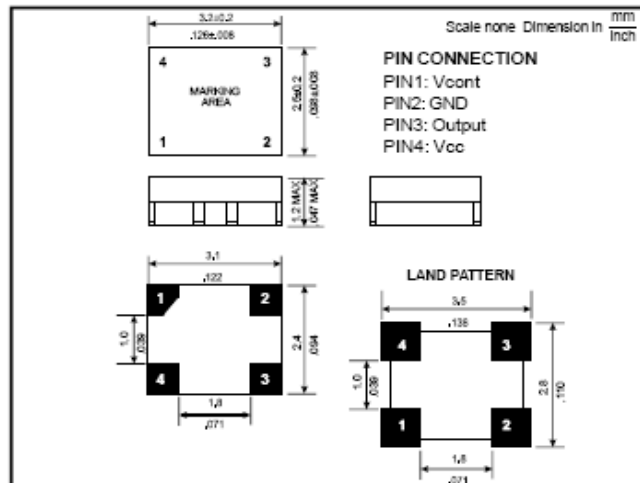

● REFLOW SOLDERING PROFILE

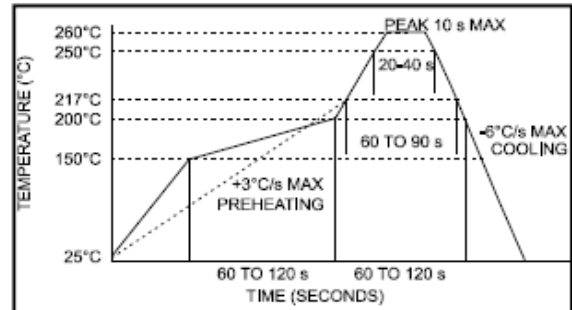

● PACKAGING

330mm REEL DIAMETER, 12mm TAPE WIDTH,
QUANTITY: 3000 PIECES PER REEL

中國 ● 香港 ● 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk