




中川電子有限公司
Nakagawa Electronics Limited

SERIES RTX-230 AND RTV-230


- FEATURES
- ULTRA MINIATURE PACKAGE
- EXCELLENT FREQUENCY STABILITY AND AGING
- 5.0 V OR 3.0 V SUPPLY VOLTAGE
- SPECIFICATIONS

SERIES		RTX-230 AND RTV-230
FREQUENCY RANGE		9.00 MHz TO 45.00 MHz
FREQUENCY STABILITY OVER TEMPERATURE RANGE†		±2.5 PPM
OPERATING TEMPERATURE RANGE		-30°C TO 75°C
FREQUENCY STABILITY VS. SUPPLY VOLTAGE		0.3 PPM AT+5V ± 5%
INPUT	VOLTAGE†	+5V ± 5%
	CURRENT	2.0 mA MAX
OUTPUT	WAVEFORM†	CLIPPED SINEWAVE OR CMOS/TTL
	LOAD	10 K OHM / 10pF OR 2 TTL/15 pF
	VOLTAGE	1Vp-p MIN
AGING		±1 PPM PER YEAR MAX
FREQUENCY ADJUSTMENT		±3 PPM MIN
FREQUENCY DEVIATION		±8 PPM TO ±15 PPM (+2.5 VDC ±2.0V)
OPERABLE TEMPERATURE RANGE		-40°C TO +85°C



† OTHER STABILITIES OVER TEMPERATURE, +3.0 V SUPPLY, AND OUTPUT WAVEFORMS ARE AVAILABLE. CONSULT RAMI FOR OTHER SPECS.

● OUTLINE DRAWING

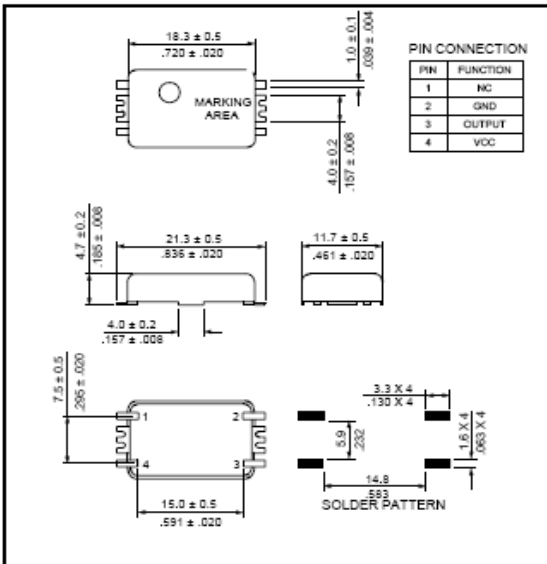

● PACKAGING
ANTI-STATIC ELECTRIC TRAY
QUANTITY: 70PIECES PER TRAY

● PART NUMBERING SYSTEM

TYPE	REVISION	SERIES	FREQUENCY STABILITY	TEMPERATURE RANGE	VOLTAGE	FREQUENCY CONTROL (RTV ONLY)	TRIMMER	WAVEFORM	FREQUENCY
RTX RTV	TBD*	230	E: ±2.5 PPM	F1 : -30°C TO 75°C	5: +5.0 VDC ± 5%	X: ±5 PPM TO ±15PPM (+2.5 V±2 V)	T	S: CLIPPED SINE C: CMOS/TTL	IN MHz


EXAMPLE: RTX* -230-EF15-TS-15.360

* REVISION IS ASSIGNED DURING MANUFACTURING

中國 ● 香港 ● 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk

● REFLOW SOLDERING PROFILE

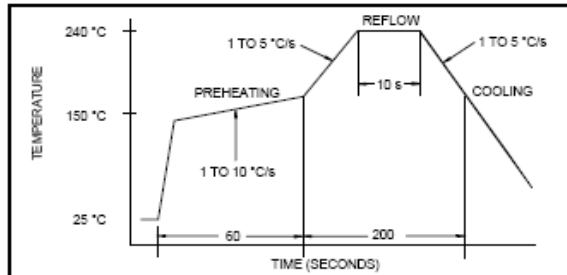

● CARRIER TRAY DIMENSIONS

