



中川電子有限公司
Nakagawa Electronics Limited

VS4 SERIES: VCXO OSCILLATOR, HCMOS, +3.3 VDC, 7x5mm Package

DESCRIPTION: A crystal controlled, high frequency, highly stable, voltage controlled oscillator, adhering to HCMOS Standards. The output can be Tri-stated to facilitate testing or combined multiple clocks. The device is contained in a sub-miniature, very low profile, leadless ceramic SMD package with 6 gold contact pads. This miniature oscillator is ideal for today's automated assembly environments.

APPLICATIONS AND FEATURES:

- Common Frequencies: 16.384 MHz; 19.44 MHz; 27 MHz; 38.88 MHz; 51.84 MHz; 77.76 MHz
- +3.3 VDC HCMOS
- Frequency Range from 1 to 125.000 MHz
- Miniature Ceramic SMD Package Available on Tape and Reel
- Lead Free and ROHS Compliant

中國 ● 香港 ● 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk



■ ELECTRICAL PARAMETERS:

PARAMETER	SYMBOL	TEST CONDITIONS ^{*1}	VALUE	UNIT
Nominal Frequency	fo		1.000 ~ 125.000	MHz
Supply Voltage	Vcc		+3.3 ±10%	VDC
Supply Current MAX	Is		35.0 ^{*5}	mA
Output Logic Type			HCMOS	
Load		Connected from output to ground	15	pF
Output Voltage Levels	Voh Vol		0.9•Vcc MIN 0.1•Vcc MAX	VDC VDC
Duty Cycle	DC	Measured at 50% of Vcc	40/60 to 60/40 or 45/55 to 55/45	%
Rise / Fall Time	tr / tf	Measured at 20/80% and 80/20% Vcc Levels	6.0 MAX ^{*2}	ns
Jitter	J	RMS, Fj = 12 kHz...20 MHz Peak-to-peak	1 TYP 6.5 TYP	ps ps
Overall Frequency Stability	Δf/fc	Op. Temp., Aging, Load, Supply and Cal. Variations	±50 ^{*4}	ppm
Control Voltage Range	VC	Positive slope; 10% linearity MAX	0 to +3.3	VDC
Settability	Vfo		+1.65 ± 0.25	VDC
Absolute Pull Range	APR	Minimum guaranteed freq. pull over Δf/fc	See Part Numbering ^{*3}	ppm
Input Impedance	Zin		10 MIN	kΩ
Modulation Bandwidth	BW	-3 dB	10 MIN	kHz
Pin 2 Output Enabled Output Disabled	En Dis	High Voltage or No Connect Ground	0.7•Vcc MIN 0.3•Vcc MAX	VDC VDC
Absolute voltage range	Vcc(abs)	Non-Destructive	-0.5...+7.0	VDC

*1 Test Conditions Unless Stated Otherwise: Nominal Vcc, Nominal Load, +25 ±3°C

*2 Frequency Dependent

*3 Not All APR's Available With All Temperature Ranges—Consult Factory For Availability

*4 Tighter stabilities available at narrow temperature ranges—Consult Factory For Availability

*5 Lower current consumption (<10mA) available at certain frequency ranges—Consult Factory For Availability

■ ENVIRONMENTAL PARAMETERS:

PARAMETER	SYMBOL	TESTCONDITIONS ^{*1}	VALUE	UNIT
Operating temperature range	Ta		SEE PART NUMBER TABLE	°C
Storage temperature range	T(stg)		-55...+90	°C

■ PART NUMBERING SYSTEM:

SERIES	SYMMETRY	TEMPERATURE RANGE (°C)	APR (ppm)	FREQUENCY (MHz)
VS4: VCXO with HCMOS Output	A: 40/60 to 60/40% T: 45/55 to 55/45%	R: 0...+50 S: 0...+70 U: -20...+70 V: -40...+85	F: ±32 ppm H: ±50 ppm G: ±80 ppm J: ±100 ppm	1.000...125.000

EXAMPLE: VS4ASH-38.880




中川電子有限公司

Nakagawa Electronics Limited

VCXO Oscillator, 7x5mm Package, +3.3 VDC Supply Voltage, HCMOS Output, 40/60% Symmetry, 0...+70°C Operating Temperature Range, ±50 ppm APR, 38.880 MHz, Enable High on Pin 2 (standard)
Consult the factory for any custom requirements.

■ MECHANICAL PARAMETERS:

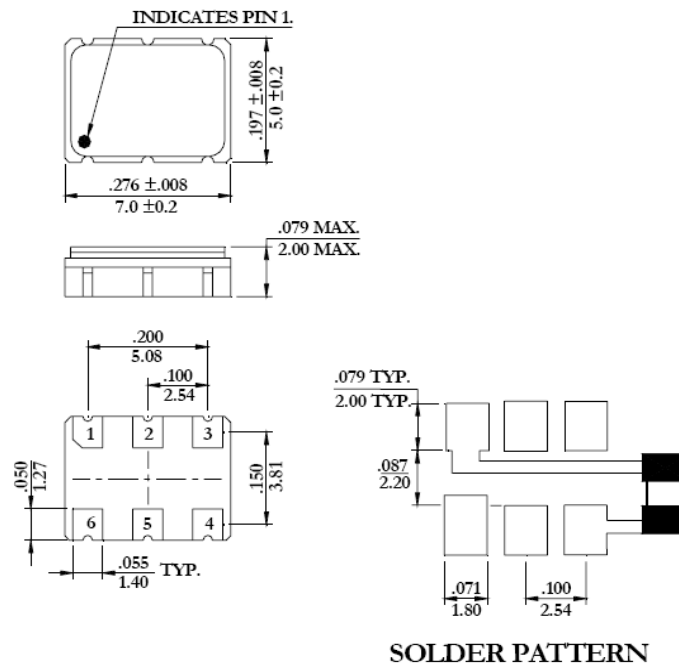

*0.01μF external by-pass filter is recommended as shown on solder pattern.

OUTLINE TOLERANCE:
±0.006" / 0.15mm
(Unless otherwise specified)

PIN FUNCTIONS:
[1] VOLTAGE CONTROL
[2] ENABLE/DISABLE
[3] CASE GROUND
[4] OUTPUT
[5] NO CONNECT
[6] SUPPLY VOLTAGE


TYP. MARKING:
VS4ASH
38.88
RAL D/C

中國 • 香港 • 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk



中川電子有限公司
Nakagawa Electronics Limited

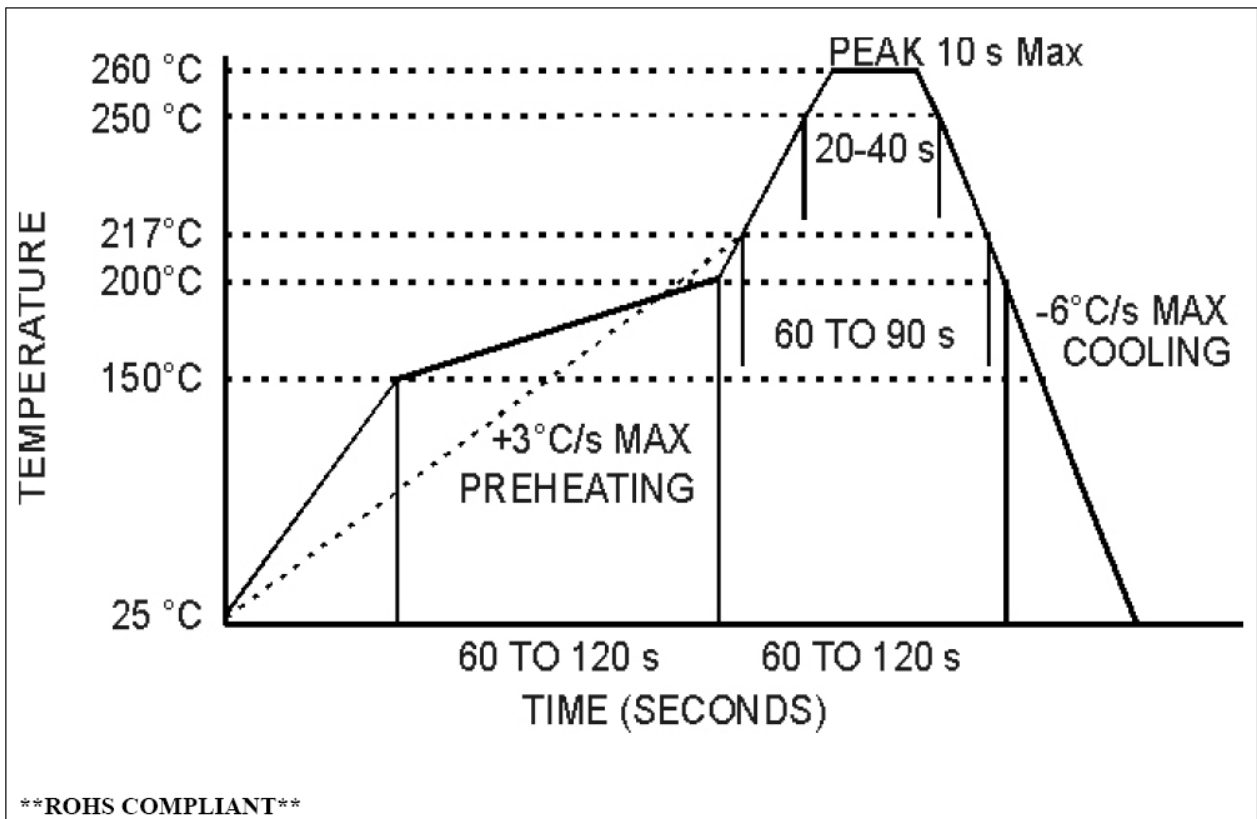

中國 • 香港 • 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China
Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk