



中川電子有限公司
Nakagawa Electronics Limited

VSY SERIES: VCXO OSCILLATOR, HCMOS, +2.5 VDC, 7x5mm Package

DESCRIPTION: A low cost voltage control crystal oscillator, high frequency, highly stable oscillator, adhering to Low Voltage Differential Signaling (LVPECL) Standards. The output can be Tri-stated to facilitate testing or combined multiple clocks. The device is contained in a sub-miniature, very low profile, leadless ceramic SMD package with 6 gold contact pads. This miniature oscillator is ideal for today's automated assembly environments.

APPLICATIONS AND FEATURES:

- Common Frequencies: 16.384 MHz; 19.44 MHz; 27 MHz; 38.88 MHz; 51.84 MHz; 77.76MHz; 123.6MHz
- +2.5 VDC HCMOS
- Frequency Range from 16 to 130 MHz
- Miniature Ceramic SMD Package Available on Tape and Reel
- Lead Free and ROHS Compliant

中國 ● 香港 ● 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk



■ ABSOLUTE MAXIMUM RATINGS:

PARAMETER	SYMBOL	VALUE	UNIT
Operating temperature range	Ta	-40...+85	°C
Storage temperature range	T(stg)	-55...+90	°C
Supply voltage range	Vcc	-0.5...+4.6	VDC
Maximum Control Voltage	Vc	-0.5...Vcc+0.5	VDC
Maximum Output Voltage	Vo	-0.5...Vcc+0.5	VDC

■ ELECTRICAL PARAMETERS:

PARAMETER	SYMBOL	TEST CONDITIONS ¹	VALUE	UNIT	
Nominal Frequency	fo		16.000 ~ 130.000	MHz	
Supply Voltage	Vcc		+2.5 ±10%	VDC	
Supply Current	Is	Nominal Vcc, Nominal Load, +25 ±3°C	Fo=27MHz Fo=35MHz Fo=78MHz Fo=126MHz	4.0 MAX, 2.8 TYP 6.0 MAX, 4.2 TYP 9.0 MAX, 7.2 TYP 12 MAX 10 TYP	mA
Power supply rejection	PsRR	Frequency Change with Vcc varied ±10%	±1 MAX	ppm	
Output Logic Type			HCMOS		
Load		Connected from output to ground	15	pF	
Output Voltage Levels	Voh Vol		0.9•Vcc MIN 0.1•Vcc MAX	VDC VDC	
Duty Cycle	DC	Measured at 50% of Vcc	40/60 to 60/40 or 45/55 to 55/45	%	
Rise / Fall Time ²	tr / tf	Measured at 20/80% and 80/20% Vcc Levels	Fo=27MHz Fo=35MHz	3.0 MAX 2.4 TYP 2.5 MAX 2 TYP	ns
Jitter	J	RMS Period Jitter 1sigma 1000 samples ⁴		2.5 TYP	ps
Phase Jitter	Jp	RMS Phase Jitter integrated from 12KHz to 20MHz ⁵		0.6 TYP	ps
Phase Noise	ε (Δf)	Typical measured at 100MHz ⁵	Δf =100Hz Offset Δf =1KHz Offset Δf =10KHz Offset Δf =100KHz Offset Δf =1MHz Offset	-80 -110 -130 -138 -145	dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz
Control Voltage Range	Vc	Positive slope; 10% linearity MAX		0 to +2.5	VDC
Control Voltage sensitivity	Δf/fc(ΔVc)			100 TYP	ppm/V
Absolute Pull Range	APR	Minimum guaranteed freq. pull over Δf/fc		See Part Numbering ³	ppm
Settability	Vfo			+1.25 ± 0.25	VDC
Input Impedance	Zin	DC to 1KHz		2 MIN	MΩ
Modulation Bandwidth	BW	-3 dB		45 MIN	kHz
ESD protection		Human Body Model		2000 MIN	VDC
Pin 2	Output Enabled Output Disabled	En Dis	High Voltage or No Connect Ground	0.7•Vcc MIN 0.3•Vcc MAX	VDC VDC

中國 • 香港 • 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk



- *1 Test Conditions Unless Stated Otherwise: Nominal Vcc, Nominal Load, +25 ±3°C
- *2 Frequency Dependent
- *3 Not All APR's Available With All Temperature Ranges—Consult Factory For Availability
- *4 Measured with Wavecrest SIA-3000A no filtering
- *5 Measured with Agilent 5500
- *6 Calculated from Agilent 5500 phase noise measurements


■ PART NUMBERING SYSTEM:

SERIES	SYMMETRY	TEMPERATURE RANGE (°C)	APR (ppm)	FREQUENCY (MHz)
VSY: VCXO with HCMOS Output	A: 40/60 to 60/40% T: 45/55 to 55/45%	R: 0...+50 S: 0...+70 U: -20...+70 V: -40...+85	F: ±32 ppm H: ±50 ppm	16.000...130.000

EXAMPLE: VSYASH-38.880

VCXO Oscillator, 7x5mm Package, +2.5 VDC Supply Voltage, HCMOS Output, 40/60% Symmetry, 0...+70°C Operating Temperature Range, ±50 ppm APR, 38.880 MHz, Enable High on Pin 2
Consult the factory for any custom requirements.


■ MECHANICAL PARAMETERS:

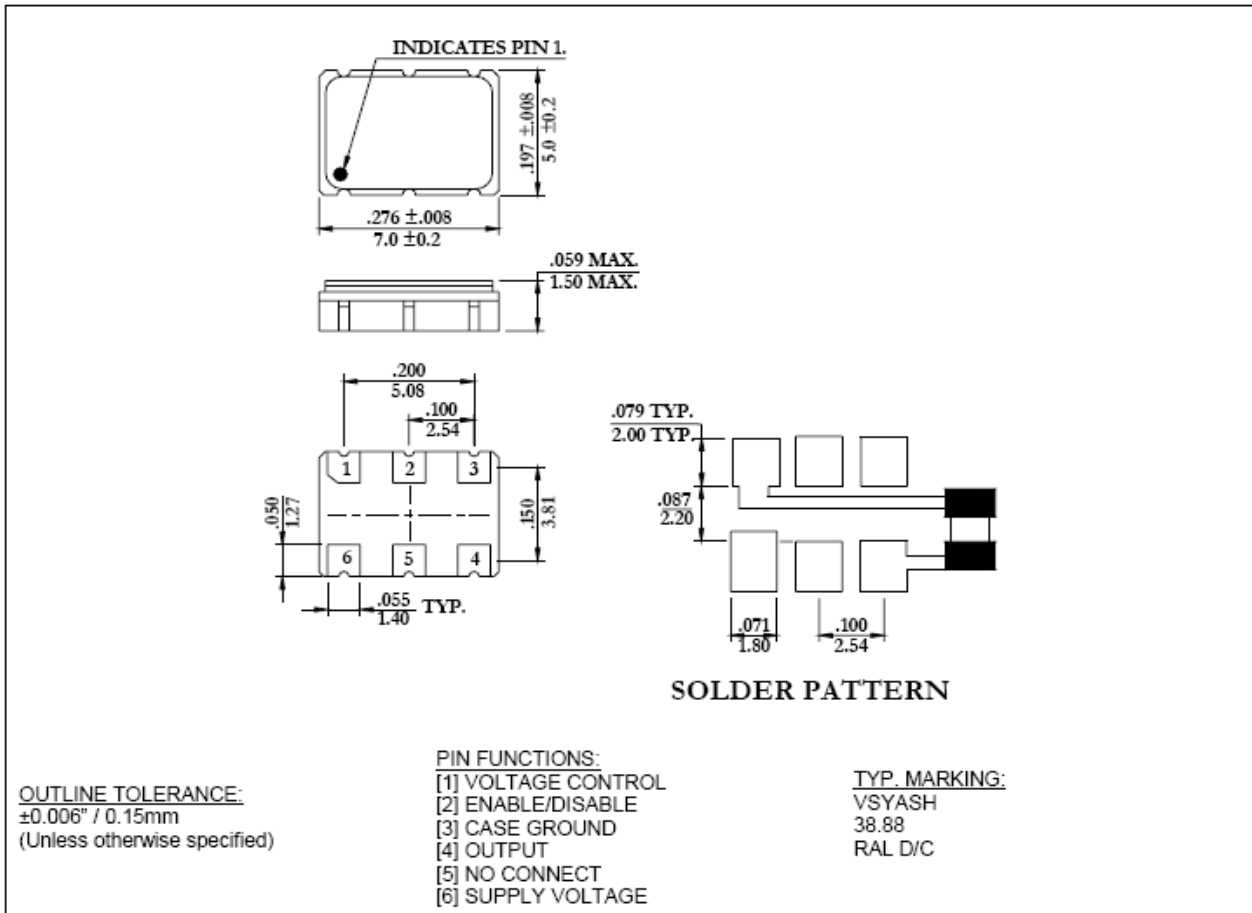

*0.01µF external by-pass filter is recommended as shown on solder pattern

中國 • 香港 • 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China
Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk

■ REFLOW PROFILE

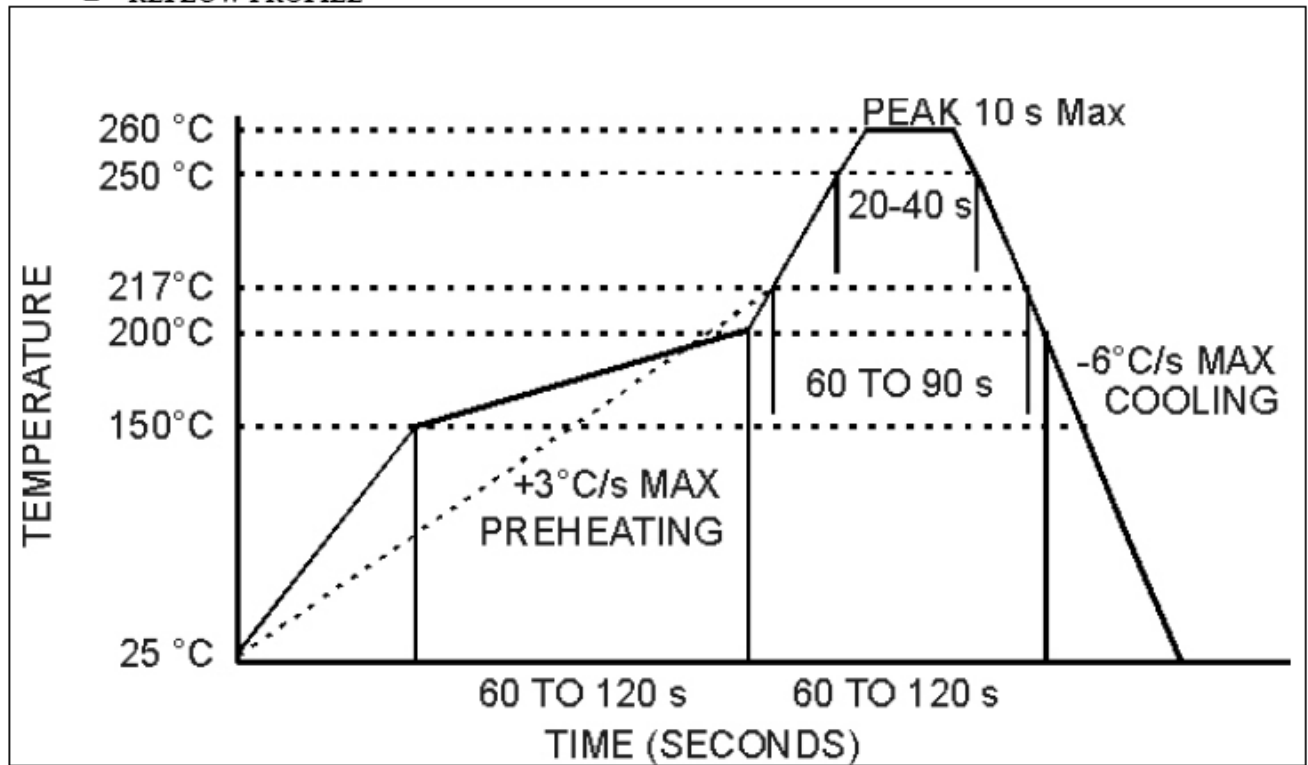

中國 • 香港 • 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk