


## VS8950A-D3-FREQ.-CF-EH

## SAW BASED VCO

### MECHANICAL SPECIFICATION

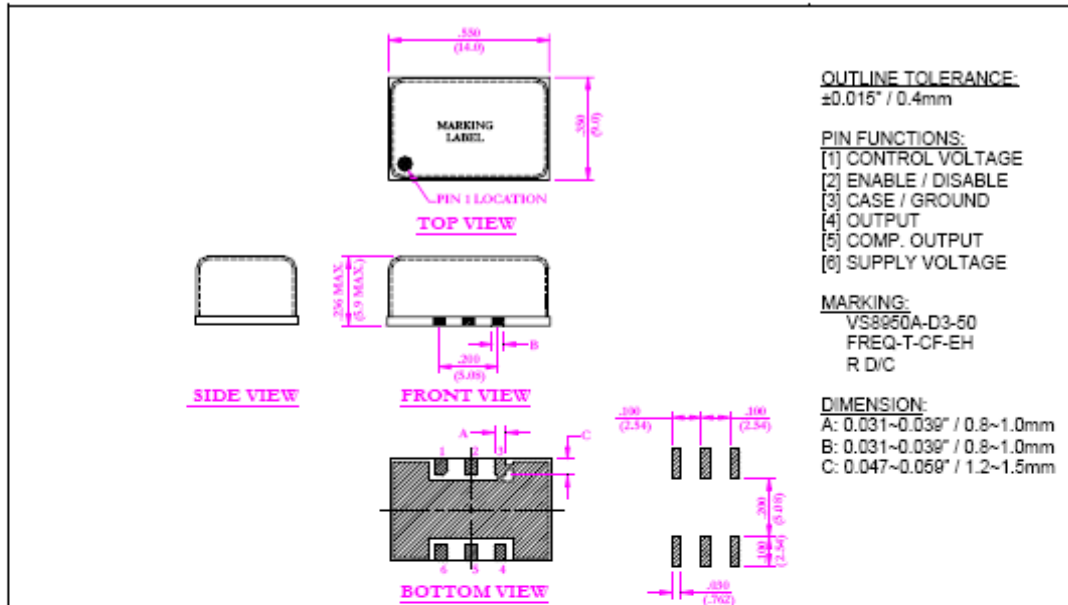

### ELECTRICAL SPECIFICATION

PARAMETER	SYMBOL	CONDITIONS	VALUE	UNIT
Frequency, nom.	fo	-	622.080; 666.5143	MHz
Supply voltage, nom.	Vcc	Vcc±10%	+3.3	V
Supply current, max.	Is	Vcc=+3.3VDC, Vc=+1.65VDC, Ta=+25°C, 50Ω to Vcc-2.0VDC load	80.0	mA
PECL output level	VOH / VOL	load=50Ω to Vcc-2.0VDC	+2.275 / +1.68	V
Duty cycle	DC	load=50Ω to Vcc-2.0VDC / 50%Vcc	45...55	%
Rise- / fall time	tr / tf	20%~80% Vout, 80%~20% Vout, max	650.0	ps
Jitter, rms, max.	J	1σ, Fj=(12kHz...20MHz)	1.0	ps
Control voltage range	Vc	DC	0...+3.3	V
Absolute pull range, min.	APR	min. guaranteed frequency shift from fo over variations in temp., aging, power supply & load.	±50.0	ppm
Transfer gain, min/typ/max	Kv	Over the control voltage range	150/200/300	ppm/V
Freq. stability vs. temperature, typ	Δf/fo (Ta)	Ta=-40°C...+85°C, (ref. to fo)	±150.0	ppm
Settability	Vfo	Ta=+25°C ±1°C	+1.65 ± 0.35	V
Linearity, max.	Δf/V	Positive slope	± 20	%
Input impedance, min.	Zin	-	10.0	KΩ
Modulation freq. bandwidth, min.	MBW(-3dB)	Vcc=+3.3VDC, Vc=+1.65VDC, Ta=+25°C, 50Ω to Vcc-2.0VDC load	10.0	KHz
Enable	En	Pin 2=High, Vcc-0.25V (min.) or "Open"	Enabled	-
Disable	Dis	Pin 2=Low, Vee+1.4V (max.)	Pin 5 will assume a fixed level of logic "1", and pin 6 will assume a fixed level of logic "0"	-
Operating temperature	Ta	-	-40...+85	°C
Storage temperature	T(stg)	-	-55...+105	°C
Absolute voltage ranges	Vcc, Vc(abs)	Non-destructive, DC	-0.5...+6.0	V

10/5/04 marketing-rfq, vcco, WEB Spec

**Note; For other Frequencies and options please consult with factory.**

中國 • 香港 • 九龍官塘開源道 55 號 開聯工業中心 7 字樓 A 座 1-2 號  
Block A, Flat 1-2, 7/F, Hoi Yuen Road, Kwun Tong, Kln, Hong Kong, China

Tel: 852-23899201 Fax: 852-23410001 E-mail: info@nkg.com.hk